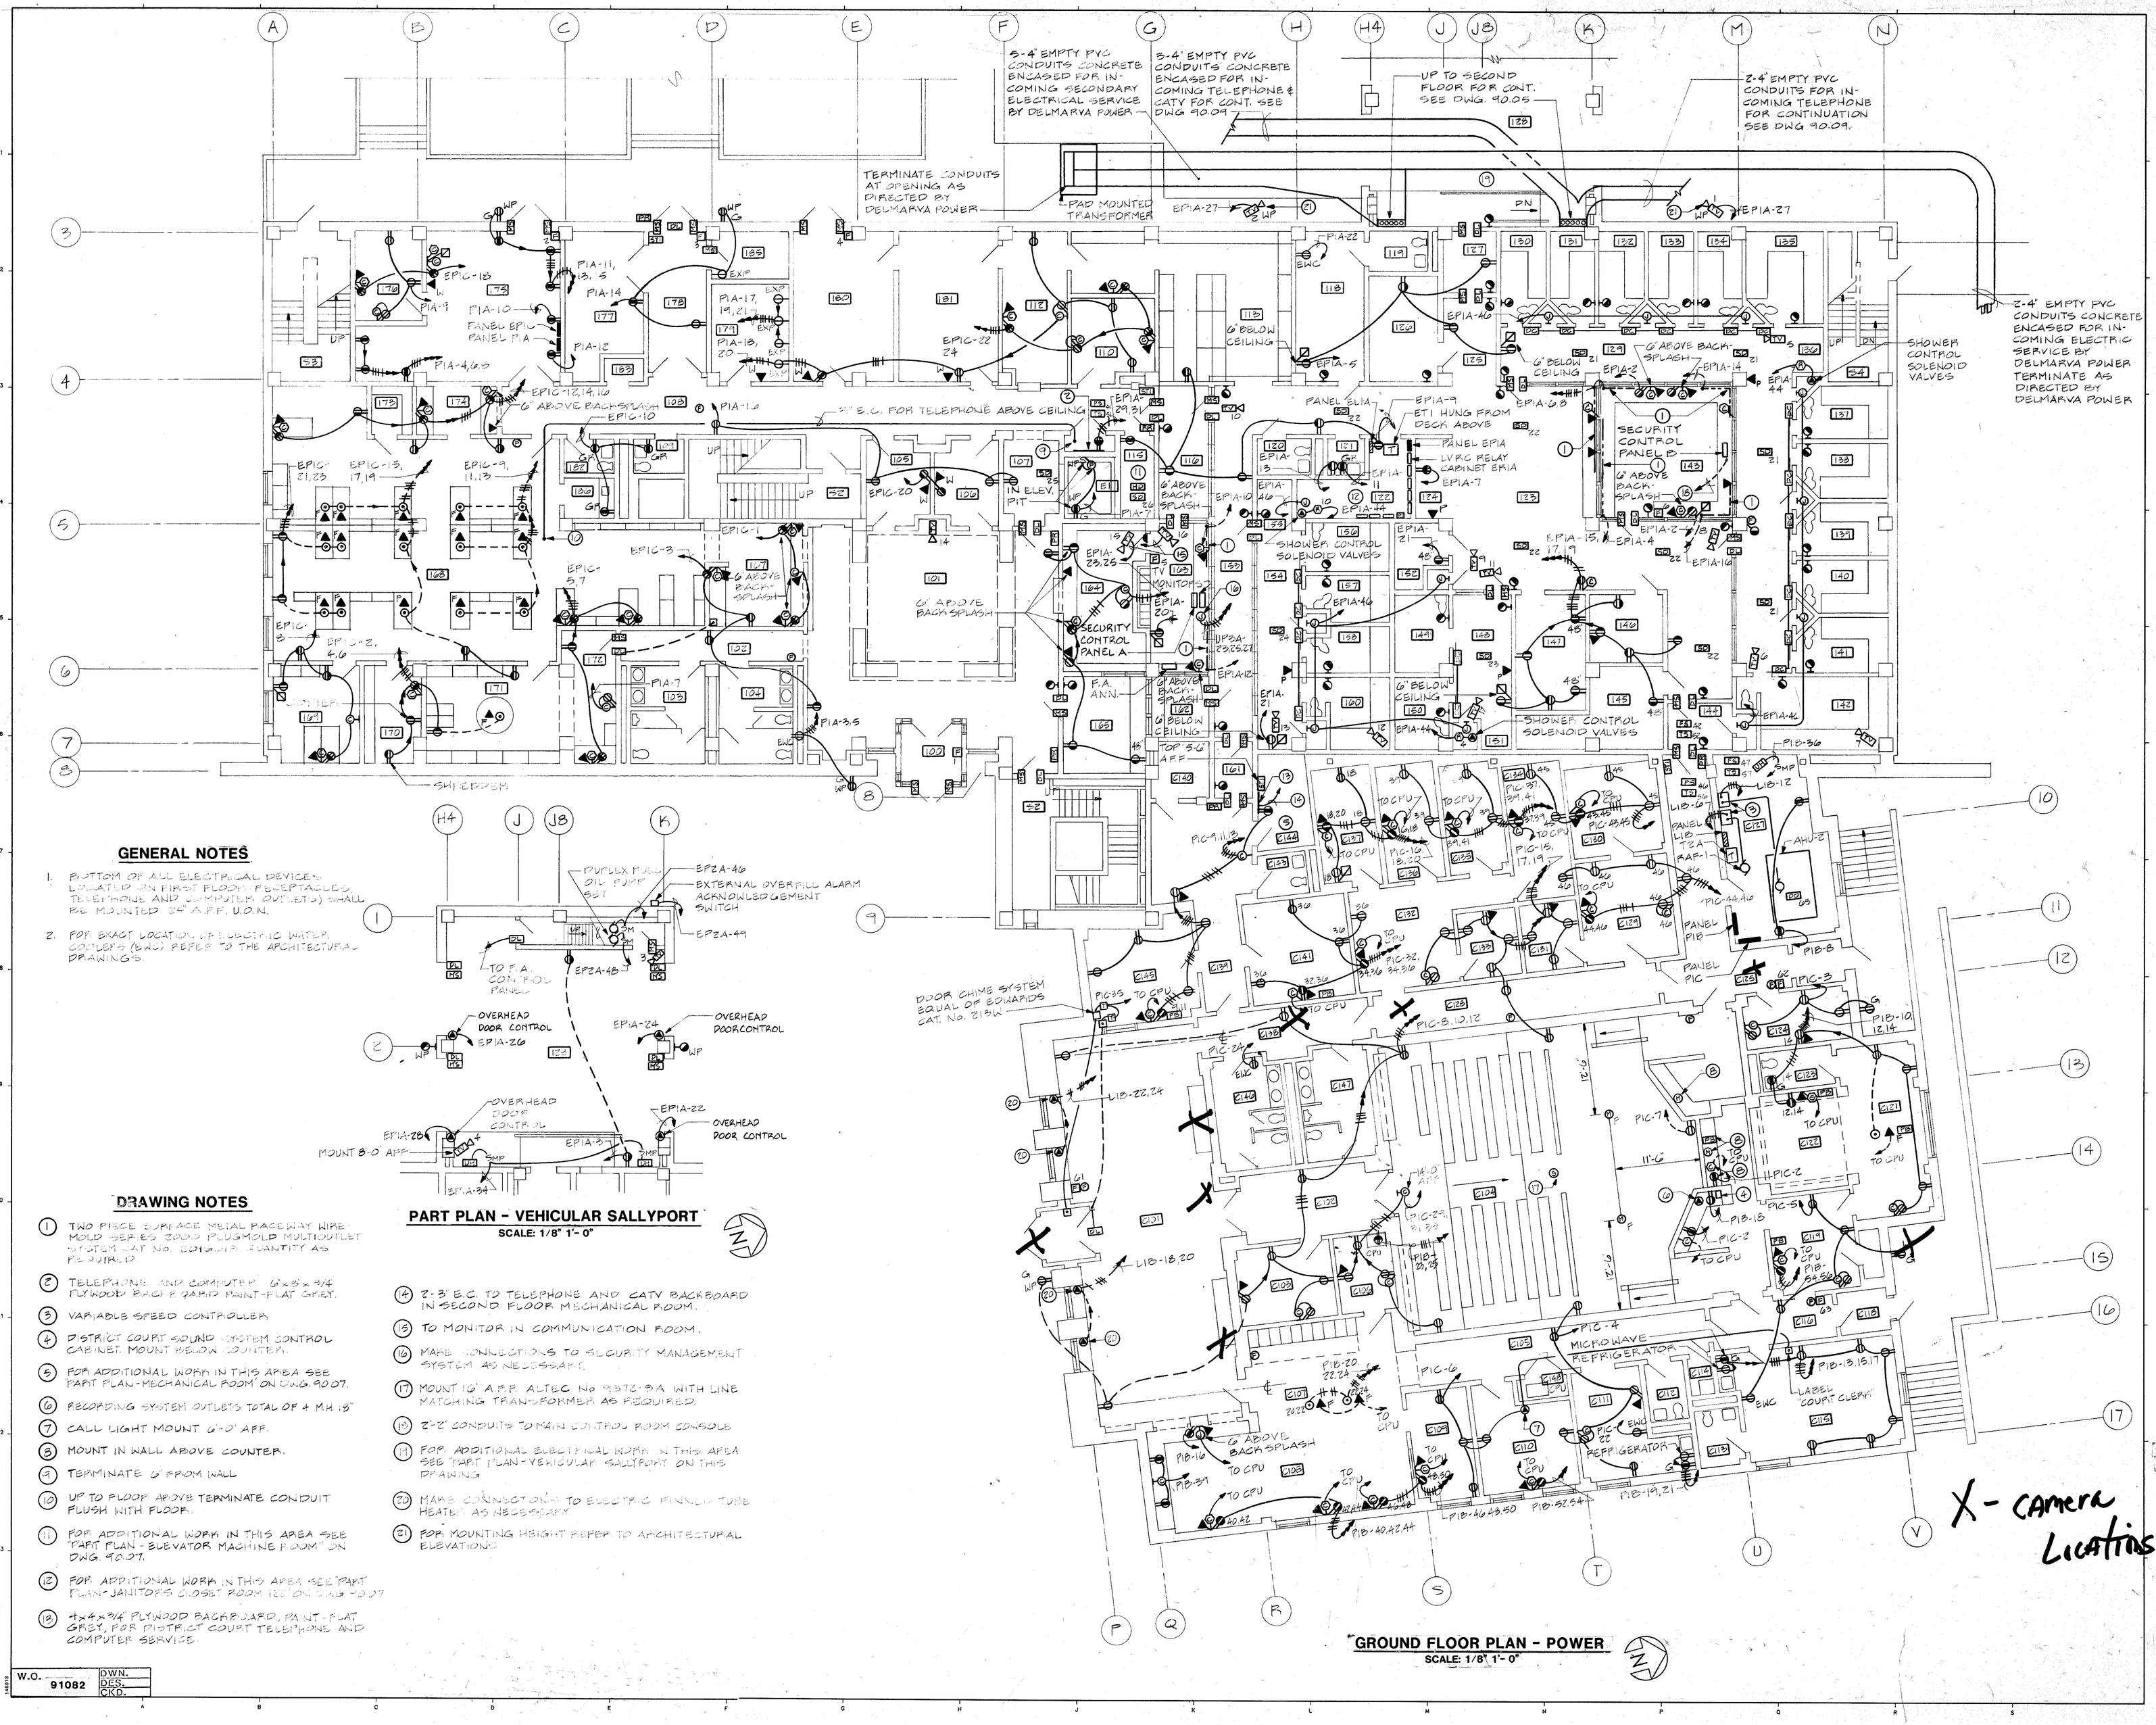

GENERAL NOTES

1. BOTTOM OF ALL ELECTRICAL DEVICES LOCATED ON FIRST FLOOR (RECEPTACLES, TELEPHONE AND COMPUTER OUTLETS) SHALL BE MOUNTED 24" A.F.F. U.O.N.
2. FOR EXACT LOCATION OF ELECTRIC WATER COOLERS (EWC) REFER TO THE ARCHITECTURAL DRAWINGS.

PART PLAN - VEHICULAR SALLYPORT
SCALE: 1/8" 1'-0"

DRAWING NOTES

1. TWO PIECE SURFACE METAL RACEWAY WIRE MOLD SERIES 2000 PLUGMOLD MULTIOUTLET SYSTEM CAT No. 2019.018 QUANTITY AS REQUIRED.
2. TELEPHONE AND COMPUTER 6"x3"x3/4" PLYWOOD BACKBOARD PAINT-FLAT GREY.
3. VARIABLE SPEED CONTROLLER
4. DISTRICT COURT SOUND SYSTEM CONTROL CABINET. MOUNT BELOW COUNTER.
5. FOR ADDITIONAL WORK IN THIS AREA SEE "PART PLAN-MECHANICAL ROOM" ON DWG. 90.07.
6. RECORDING SYSTEM OUTLETS TOTAL OF 4 M.H. 18"
7. CALL LIGHT MOUNT 6'-0" AFF.
8. MOUNT IN WALL ABOVE COUNTER.
9. TERMINATE 6" FROM WALL
10. UP TO FLOOR ABOVE TERMINATE CONDUIT FLUSH WITH FLOOR.
11. FOR ADDITIONAL WORK IN THIS AREA SEE "PART PLAN - ELEVATOR MACHINE ROOM" ON DWG. 90.07.
12. FOR ADDITIONAL WORK IN THIS AREA SEE "PART PLAN-JANITORS CLOSET ROOM 122" ON DWG 90.07
13. 4x4x3/4" PLYWOOD BACKBOARD, PAINT-FLAT GREY, FOR DISTRICT COURT TELEPHONE AND COMPUTER SERVICE.
14. 2-3" E.C. TO TELEPHONE AND CATV BACKBOARD IN SECOND FLOOR MECHANICAL ROOM.
15. TO MONITOR IN COMMUNICATION ROOM.
16. MAKE CONNECTIONS TO SECURITY MANAGEMENT SYSTEM AS NECESSARY.
17. MOUNT 16" A.F.F. ALTEC No 9372-8A WITH LINE MATCHING TRANSFORMER AS REQUIRED.
18. 2"-2" CONDUITS TO MAIN CONTROL ROOM CONSOLE
19. FOR ADDITIONAL ELECTRICAL WORK IN THIS AREA SEE "PART PLAN-VEHICULAR SALLYPORT ON THIS DRAWING
20. MAKE CONNECTIONS TO ELECTRIC FINNED TUBE HEATER AS NECESSARY
21. FOR MOUNTING HEIGHT REFER TO ARCHITECTURAL ELEVATIONS

GROUND FLOOR PLAN - POWER
SCALE: 1/8" 1'-0"

W.O.	DWN.
91082	DES.
	CKD.

PUBLIC SAFETY BUILDING and DISTRICT COURT BUILDING for the TOWN OF OCEAN CITY

CIVIL ENGINEERS
Davis, Bowen & Friedel
1 Plaza East, Suite 200
Post Office Box 93
Salisbury, Maryland 21803-0093

LANDSCAPE ARCHITECTS
Graham Landscape Architecture
229 Prince George Street
Annapolis, Maryland 21401

STRUCTURAL ENGINEERS
LPJ, Inc.
16 West 25th Street
Baltimore, Maryland 21218

MECHANICAL/ELECTRICAL ENGINEERS
Gipe Associates
8659 Commerce Drive
Easton, Maryland 21601

COMMUNICATIONS
RAM Communications
253 Pendleton Court
Arnold, Maryland 21012

COST ESTIMATING
DMS International, Inc.
8401 Colesville Road, Suite 620
Silver Spring, Maryland 20910

PROGRAMMING
Carter Goble Associates
1225 I Street, NW
Suite 890
Washington, DC 20005

Lawrence Osgott

Number	Date	Revision

Architects and Planners
222 St. Paul Place
Baltimore, Maryland 21202
301/347-8500

GROUND FLOOR PLAN - POWER

AYERS SAINT GROSS

Job Number	Date
9145.20	11/6/92
Drawn by	Scale 1/8" 1'-0"
Sheet Number	90.04